




SIGN TABULATION			
PLAN SYMBOL	SERIES NUMBER	SIZE	REMARKS
A	R3-7L	30"x30"	LEFT LANE MUST TURN LEFT
B	R3-7R	30"x30"	RIGHT LANE MUST TURN RIGHT
C	R10-3E(L)	9"x15"	EDUCATIONAL PUSH BUTTON FOR WALK SIGNAL WITH COUNTDOWN TIMER
D	R10-3E(R)	9"x15"	EDUCATIONAL PUSH BUTTON FOR WALK SIGNAL WITH COUNTDOWN TIMER
E	R10-10L	30"x36"	LEFT TURN SIGNAL
F	R10-11	30"x36"	NO TURN ON RED
G	R10-12	30"x36"	LEFT TURN YIELD ON GREEN
J	R3-8B	48"x30"	LANE USE CONTROL SIGN (L-S-R)
K	D3-4	96"x16"	KING OF PRUSSIA RD
L	D3-4	60"x16"	RAIDER RD
M	W3-3	36"x36"	SIGNAL AHEAD

FONT : D 2000
13% REDUCTION
8" UPPER CASE
6" LOWER CASE

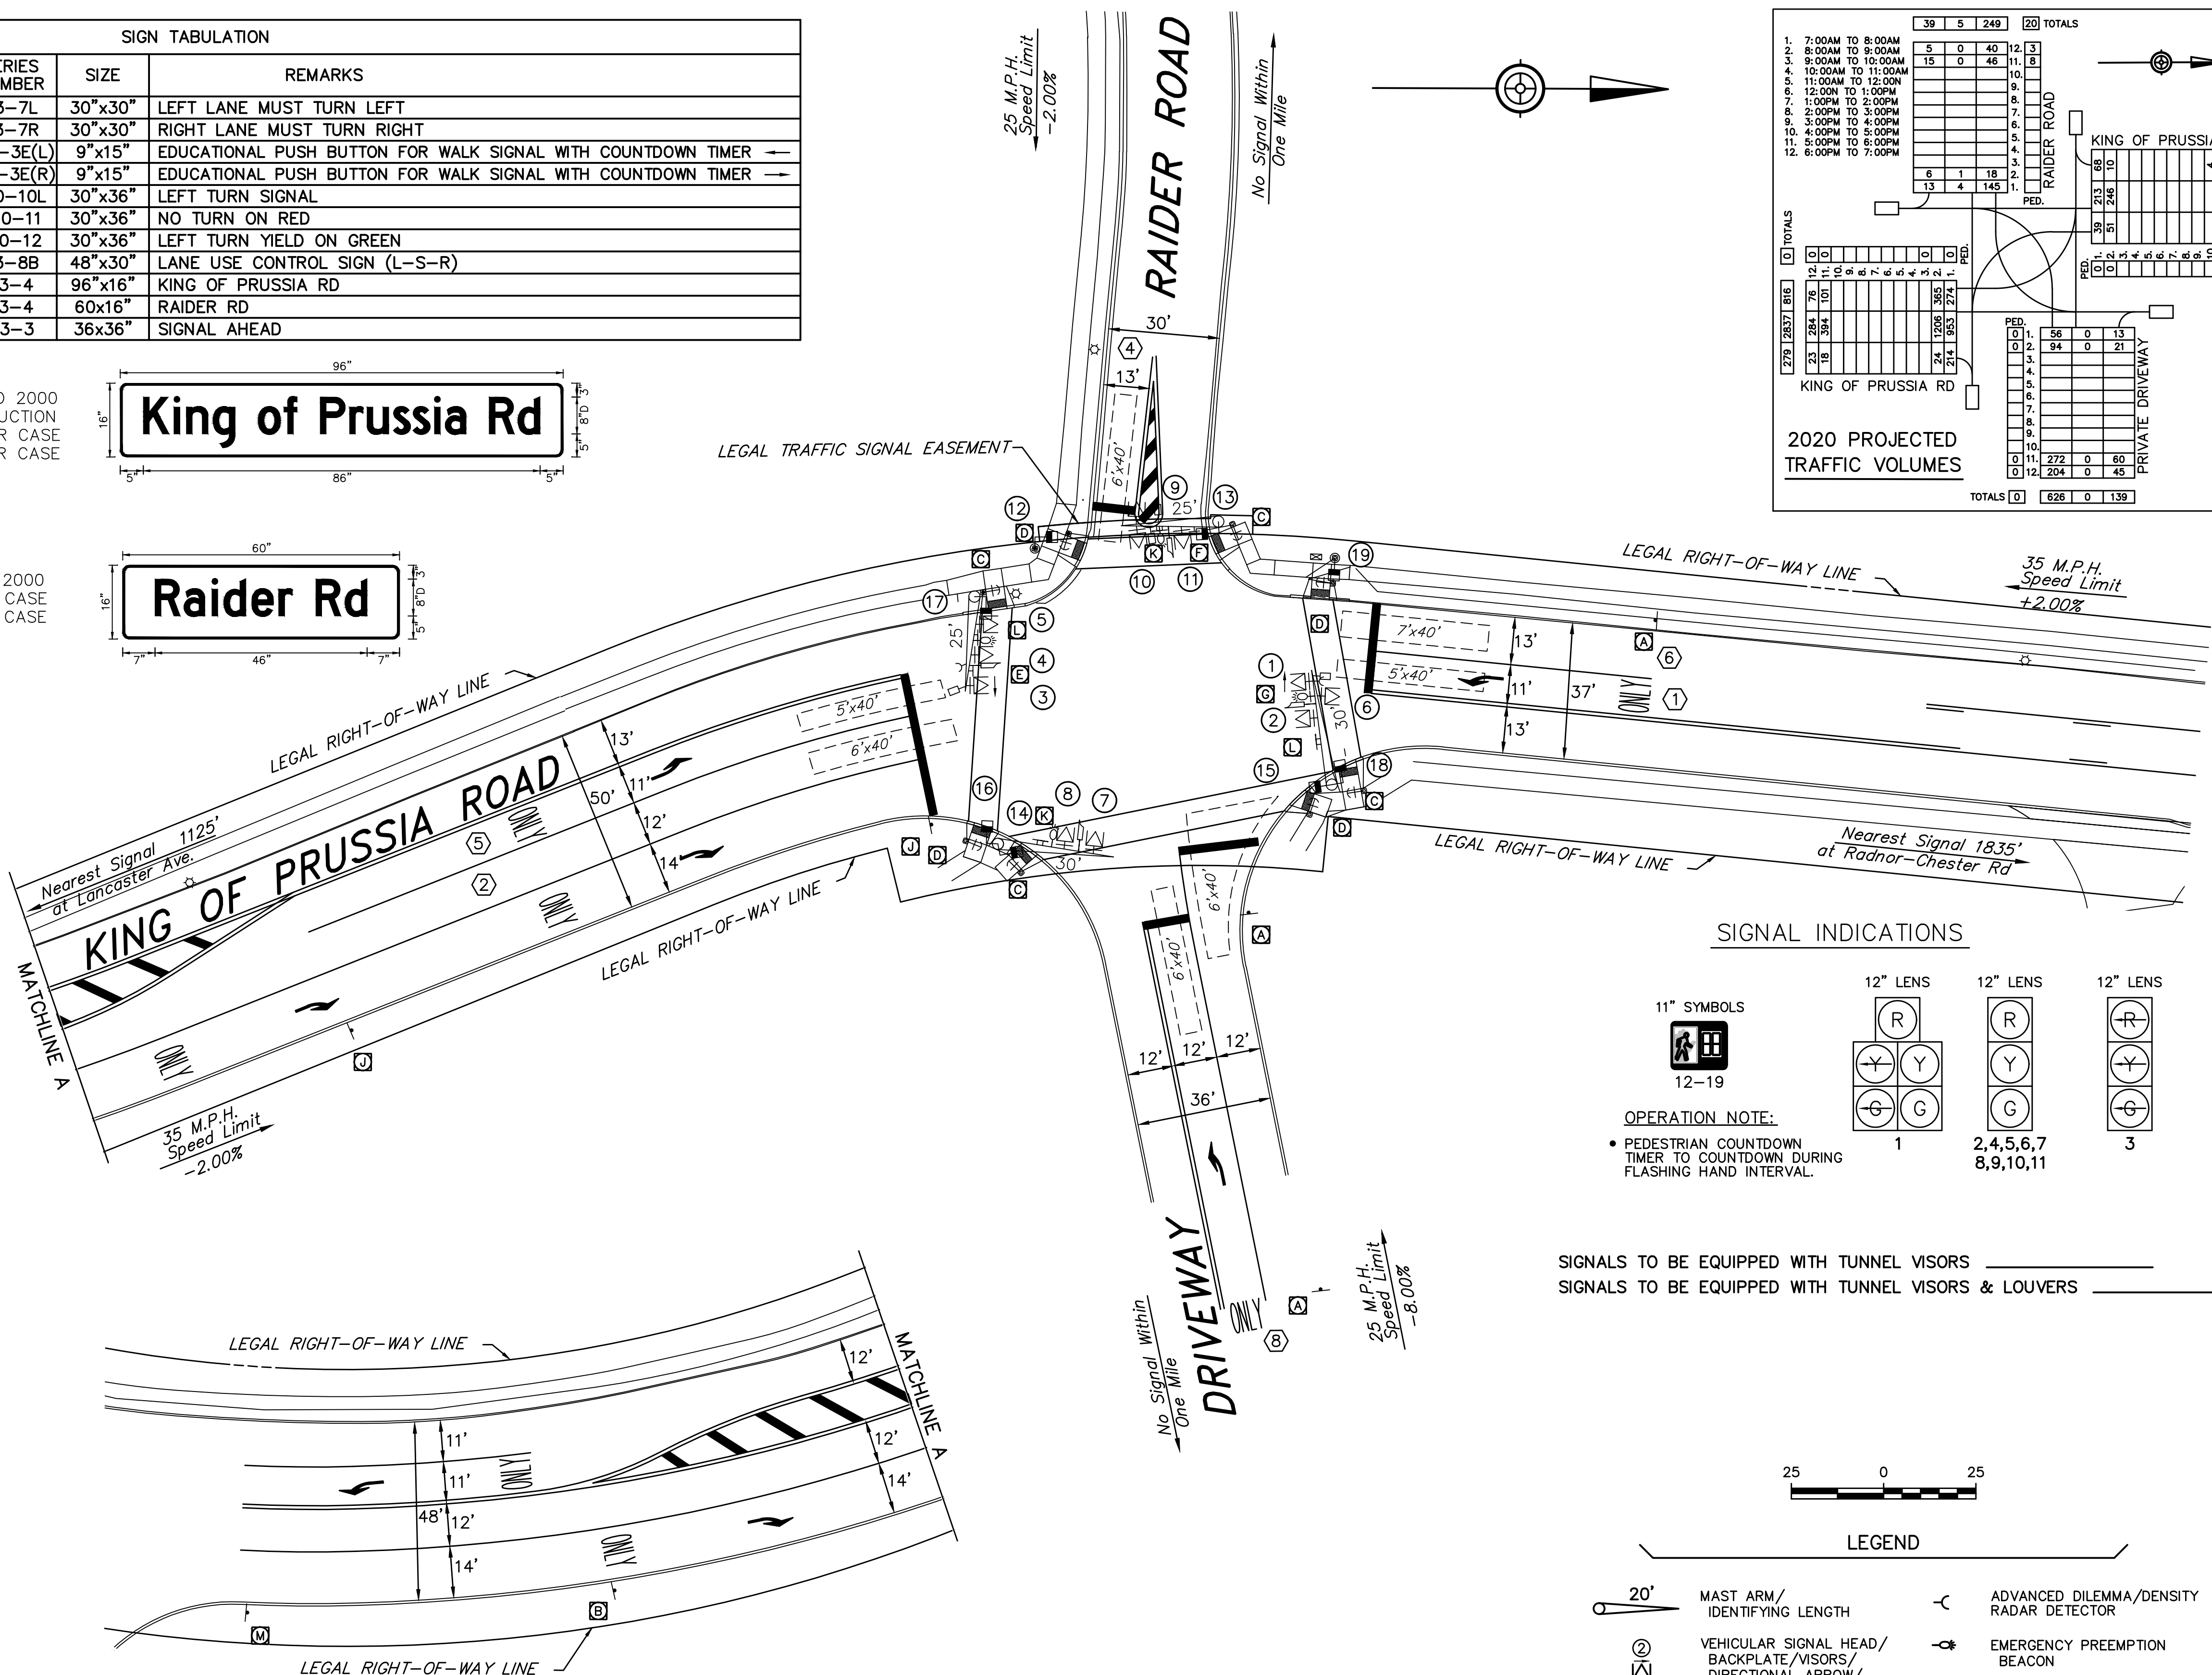

FONT : D 2000
8" UPPER CASE
6" LOWER CASE



39		5		249		20		TOTALS	
1.	7:00AM TO 8:00AM	5	0	40	12	3			
2.	8:00AM TO 9:00AM	15	0	46	11	3			
3.	9:00AM TO 10:00AM	15	0	46	11	3			
4.	10:00AM TO 11:00AM								
5.	11:00AM TO 12:00PM								
6.	12:00PM TO 1:00PM								
7.	1:00PM TO 2:00PM								
8.	2:00PM TO 3:00PM								
9.	3:00PM TO 4:00PM								
10.	4:00PM TO 5:00PM								
11.	5:00PM TO 6:00PM								
12.	6:00PM TO 7:00PM								
TOTALS		6	1	18	5	3			
TOTALS		13	4	145	1	1			

2020 PROJECTED TRAFFIC VOLUMES

GENERAL NOTES

NO MODIFICATIONS OF THIS INSTALLATION ARE PERMITTED UNLESS PRIOR APPROVAL IS GRANTED IN WRITING BY A REPRESENTATIVE OF THE DEPARTMENT OF TRANSPORTATION.

ALL MAINTENANCE WORK INCLUDING TRIMMING OF TREES, NECESSARY FOR PROPER VISIBILITY OF THE SIGNALS IS THE RESPONSIBILITY OF THE PERMITTEE.

ALL SIGNS AND PAVEMENT MARKINGS INDICATED ON THIS DRAWING ARE CONSIDERED PART OF THE PERMIT AND SHALL BE INSTALLED AND MAINTAINED IN ACCORDANCE WITH PUBLICATION NO. 212.

POST MOUNTED SIGNALS SHALL BE INSTALLED WITH THE SIGNAL HEADS A MINIMUM OF 2 FEET BEHIND THE FACE OF CURB OR THE EDGE OF THE SHOULDER. SUPPORT POLES FOR OVERHEAD SIGNALS SHALL ALSO HAVE A MINIMUM CLEARANCE HORIZONTALLY OF 2 FEET.

SIGNALS ERECTED OVER THE ROADWAY SHALL HAVE A MINIMUM VERTICAL CLEARANCE OF 16 FT. ABOVE THE ROADWAY. POST MOUNTED SIGNALS SHALL BE A MINIMUM OF 8 FT. ABOVE THE SIDEWALK OR PAVEMENT.

ALL OVERHEAD SIGNALS MUST BE RIGIDLY MOUNTED, TOP AND BOTTOM, AND EQUIPPED WITH BACKPLATES.

THE MINIMUM HORIZONTAL DISTANCE BETWEEN SIGNALS MEASURED AT RIGHT ANGLES TO THE APPROACH SHALL BE 8 FEET.

EXACT LOCATION OF DETECTORS SHALL BE DETERMINED PRIOR TO INSTALLATION BY A REPRESENTATIVE OF PENNDOT.

PRIOR TO INSTALLATION THE CONTRACTOR SHALL CONSULT THE LOCAL OFFICIALS AND UTILITY COMPANIES TO RESOLVE ANY PROBLEMS WHICH MAY BE CREATED DUE TO THE LOCATION OF UTILITIES.

THIS DRAWING CANNOT BE USED AS A CONSTRUCTION DRAWING UNLESS THE PERMITTEE COMPLIES WITH THE PROVISIONS OF THE LATEST AMENDMENT TO ACT 287, PREVENTION OF DAMAGE TO UNDERGROUND UTILITIES, DATED DECEMBER 20, 1974.

WHEN LIQUID FUELS MONEY IS USED, SIGNAL INSTALLATION MUST CONFORM TO FORM 408 AND A COPY OF THE PROPOSED SPECIFICATIONS MUST BE SUBMITTED TO THE DISTRICT TRAFFIC UNIT, FOR REVIEW, PRIOR TO BIDDING.

CONDUIT INSTALLED IN BITUMINOUS ROADWAY LESS THAN 5 YEARS OLD, OR CONCRETE ROADWAY REGARDLESS OF AGE, MUST BE BORED OR JACKED UNDER THE ROADWAY. INSTALL IN ACCORDANCE WITH TRAFFIC SIGNAL STANDARDS TC-8800 SERIES.

SYSTEM PERMIT # I-0010

PENNSYLVANIA DEPARTMENT OF TRANSPORTATION
ENGINEERING DISTRICT 6-0

COUNTY: DELAWARE
MUNICIPALITY: RADNOR TOWNSHIP
INTERSECTION: KING OF PRUSSIA ROAD AND RAIDER ROAD

REVIEWED: _____ DATE _____


MUNICIPAL OFFICIAL _____ DATE _____

RECOMMENDED: _____ DATE _____


DISTRICT TRAFFIC ENGINEER _____ DATE _____

NO.	REVISION	DES./REV.	DATE	REV.	DATE	RECOM.	DATE
1							
2							
3							
4							
5							
6							
7							
8							

USER NAME: SPENCER SLACK
 FILE NAME: R:\Projects\UPHS\UPHS1504-145 King of Prussia Road\DESIGN_PUBLISH\TRAFFIC SIGNAL\UPHS1504-SC-Plans.dwg
 DATE PLOTTED: 4/12/2018 2:32:11 PM
 DATE SAVED: 4/12/2018 2:32:03 PM

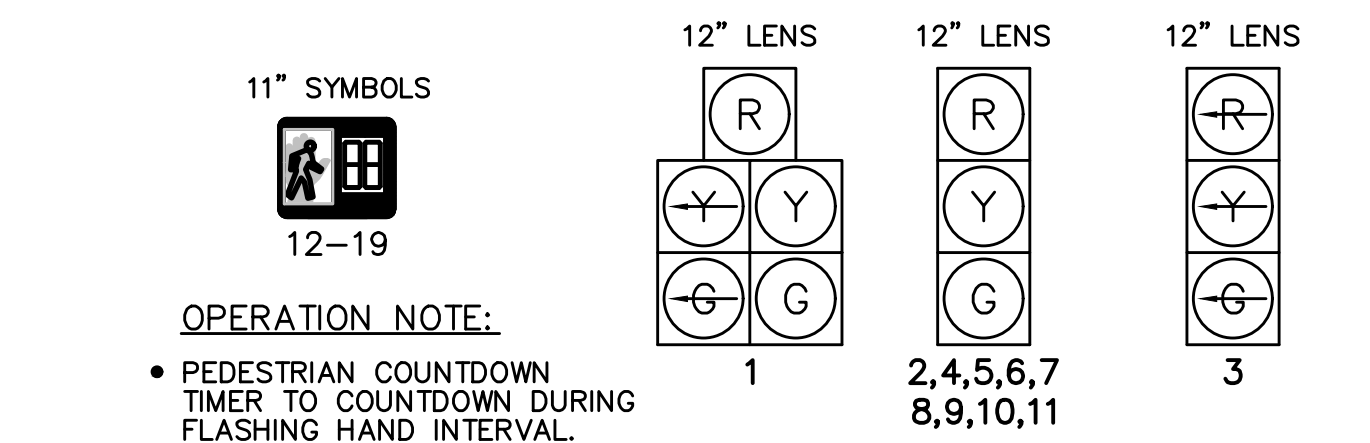

SIGNALS TO BE EQUIPPED WITH TUNNEL VISORS _____
 SIGNALS TO BE EQUIPPED WITH TUNNEL VISORS & LOUVERS _____



LEGEND

- 20' MAST ARM/IDENTIFYING LENGTH
- VEHICULAR SIGNAL HEAD/BACKPLATE/VISORS/DIRECTIONAL ARROW/IDENTIFYING NUMBER
- PEDESTRIAN SIGNAL HEAD/IDENTIFYING NUMBER
- PEDESTRIAN PUSHBUTTON/SIGN
- SIGN/IDENTIFYING LETTER
- ZONE OF DETECTION
- ADVANCED DILEMMA/DENSITY RADAR DETECTOR
- EMERGENCY PREEMPTION BEACON
- EMERGENCY PREEMPTION DETECTOR
- CURB CUT RAMP
- UTILITY POLE
- PHASE NUMBER
- INLET
- VIDEO DETECTION CAMERA

USER NAME: SPENCER SLACK
 FILE NAME: R:\Projects\UPHS\UPHS1504-145 King of Prussia Road\DESIGN_PUBLISH\TRAFFIC SIGNAL\UPHS1504-SC-Plans.dwg
 DATE PLOTTED: 4/17/2018 @ 8:42:45 AM

MOVEMENT, SEQUENCE AND TIMING DIAGRAM

PHASE	1+5			1+6			2+5			2+6				4+8				EMERGENCY FLASHING
SIGNALS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	
1	R	R	R	R	R	R	G	Y	R	G	G	Y	R	R	R	R	R	
2	R	R	R	R	R	R	G	Y	R	G	G	Y	R	R	R	R	R	
3	G	Y	R	G	Y	R	R	R	R	R	R	R	R	R	R	R	R	
4,5,6	R	R	R	G	Y	R	R	R	R	G	G	Y	R	R	R	R	R	
7,8,9	R	R	R	R	R	R	R	R	R	R	R	R	R	G	G	Y	R	
10,11	R	R	R	R	R	R	R	R	R	R	R	R	R	G	G	Y	R	
12,13,14,15	H	H	H	H	H	H	H	H	H	M	FH	H	H	H	H	H	H	
16,17,18,19	H	H	H	H	H	H	H	H	H	H	H	H	H	M	FH	FH	H	

FIXED		4	2		4	2		4	2		4	2		4	2
MINIMUM	3			3			3			28			7		
PASSAGE	3			3			3			**			3		
MAXIMUM I	5			5			5			47			20		
MAXIMUM II	5			5			5			47			20		
PEDESTRIAN*										7	21		5	16	
MEMORY	NL			NL			NL			MX			NL		

* UPON PEDESTRIAN ACTUATION ONLY, OTHERWISE HAND SYMBOL AT ALL TIMES
 NOTE: REFER TO SYSTEM PERMIT # I-0010 FOR PROGRAM TIMING & WEEKLY PROGRAM CHART

- SIGNAL TO DWELL IN 2+6 UNTIL ACTUATED BY 4+8 OR 1+5

OPERATIONAL NOTES

- ① R/G IF FOLLOWED BY PHASE 2+5
- ② G IF FOLLOWED BY PHASE 1+6
- ③ G IF FOLLOWED BY PHASE 2+6
- ④ G/Y IF FOLLOWED BY PHASE 2+6

** DENSITY ZONE NOTES

- RANGE OF DETECTION: 0-100 FEET FROM STOP BAR
- SPEED BOUNDARY: 5-30 MPH

** ADVANCED DILEMMA ZONE NOTES

- ESTIMATED TIME OF ARRIVAL: MIN 2.5-MAX 5.5 SEC.
- RANGE OF DETECTION: 0-450 FEET
- SPEED BOUNDARY: 27-100 MPH

EMERGENCY PRE-EMPTION PHASING MOVEMENT, SEQUENCE AND TIMING DIAGRAM

PHASE	2			6			4			8		
SIGNALS	18	19	20	21	22	23	24	25	26	27	28	29
1	R	R	R	G	Y	R	R	R	R	R	R	R
2	R	R	R	G	Y	R	R	R	R	R	R	R
3	G	Y	R	R	R	R	R	R	R	R	R	R
4,5,6	G	Y	R	R	R	R	R	R	R	R	R	R
7,8,9	R	R	R	R	R	R	G	Y	R	R	R	R
10,11	R	R	R	R	R	R	R	R	R	G	Y	R
12,13,14,15	H	H	H	H	H	H	H	H	H	H	H	H
16,17,18,19	H	H	H	H	H	H	H	H	H	H	H	H
FIXED	①	4	2	①	4	2	①	4	2	①	4	2

- ① FOR DURATION OF PREEMPTION
- ② TO REMAIN G WHEN RETURNING TO NORMAL OPERATION
- ③ TO INDICATE G/Y WHEN RETURNING TO NORMAL OPERATION

EMERGENCY PRE-EMPTION NOTES:

CONTROLLER TO BE EQUIPPED WITH EMERGENCY PRE-EMPTION FOR THE NORTHBOUND AND SOUTHBOUND APPROACHES OF KING OF PRUSSIA ROAD, THE EASTBOUND APPROACH OF RAIDER ROAD, AND THE WESTBOUND APPROACHES OF THE PRIVATE DRIVEWAY WITH A FAIL SAFE DEVICE FOR EACH DIRECTION OF OPERATION. THIS FAIL SAFE DEVICE SHALL CONSIST OF A FLASHING WHITE FLOOD LIGHT, AND SHALL BEGIN FLASHING WHEN THE PREEMPTION PHASE DISPLAYS PREEMPTION GREEN FOR THE EMERGENCY VEHICLE APPROACH.

THE SIGNALS, WHEN ACTIVATED BY EMERGENCY VEHICLE, SHALL TERMINATE ALL GREEN INDICATIONS, EXCEPT THE GREEN INDICATIONS FOR THE PHASE GOVERNED BY THE APPROACHING EMERGENCY VEHICLE, FOLLOWED BY COMPLETE YELLOW AND RED CLEARANCE INTERVALS, ACCORDINGLY. THEN THE "GREEN" INTERVAL FOR THE PREEMPTED PHASE SHALL FOLLOW ONLY THOSE PHASES NOT POSING A YELLOW TRAP CONDITION MAY REMAIN GREEN (1+6, 2+5) WHEN GOVERNED BY APPROACHING EMERGENCY VEHICLE.

IF THE SIGNALS, WHEN ACTIVATED BY AN EMERGENCY VEHICLE, ARE FLASHING ALL SIGNALS SHALL REMAIN FLASHING.

THE SIGNALS, WHEN ACTIVATED BY EMERGENCY VEHICLE, SHALL TIME OUT ALL YELLOW AND RED INDICATIONS, FOLLOWED BY THE GREEN INTERVAL OF THE PRE-EMPTION PHASE GOVERNED BY THE APPROACHING EMERGENCY VEHICLE.

IF SIGNALS HAVE BEEN ACTUATED BY PEDESTRIAN PUSHBUTTON, AND THE SIGNAL IS PRE-EMPTED DURING THE "MAN" INTERVAL, THE MAN INTERVAL SHALL TERMINATE IMMEDIATELY, FOLLOWED BY THE "FLASHING HAND" INDICATION IN ITS ENTIRETY. THIS INTERVAL SHALL TIME OUT FOLLOWED BY THE APPROPRIATE SELECTIVE CLEARANCES BEFORE GOING INTO EMERGENCY PRE-EMPTION.

UPON COMPLETION OF PRE-EMPTION PHASE 2, 4, 6 OR 8 IN RETURNING TO NORMAL OPERATION, PHASE 2+6 INTERVAL 10 SHALL FOLLOW.

IN EMERGENCY PRE-EMPTION, NO PRIORITY SHALL BE ESTABLISHED. PRE-EMPTION SHALL BE A "FIRST COME, FIRST SERVE" OPERATION.

IF PREEMPTION EQUIPMENT HAS ENCODING CAPABILITIES FOR THE IDENTIFICATION OF VEHICLES, IT IS RECOMMENDED TO HAVE THE ZERO "00" FEATURE ON, TO GIVE UNCODED EMITTERS THE ABILITY TO ACTIVATE THE EMERGENCY PREEMPTION.

IF ADDITIONAL PRE-EMPTION PHASES ARE ACTIVATED WHILE IN PRE-EMPTION, THE ORIGINAL PRE-EMPTION PHASE SHALL TIME OUT BEFORE PROCEEDING TO THE NEXT PRE-EMPTION PHASE.

GENERAL NOTES

NO MODIFICATIONS OF THIS INSTALLATION ARE PERMITTED UNLESS PRIOR APPROVAL IS GRANTED IN WRITING BY A REPRESENTATIVE OF THE DEPARTMENT OF TRANSPORTATION.

ALL MAINTENANCE WORK INCLUDING TRIMMING OF TREES, NECESSARY FOR PROPER VISIBILITY OF THE SIGNALS IS THE RESPONSIBILITY OF THE PERMITTEE.

ALL SIGNS AND PAVEMENT MARKINGS INDICATED ON THIS DRAWING ARE CONSIDERED PART OF THE PERMIT AND SHALL BE INSTALLED AND MAINTAINED IN ACCORDANCE WITH PUBLICATION NO. 212.

POST MOUNTED SIGNALS SHALL BE INSTALLED WITH THE SIGNAL HEADS A MINIMUM OF 2 FEET BEHIND THE FACE OF CURB OR THE EDGE OF THE SHOULDER. SUPPORT POLES FOR OVERHEAD SIGNALS SHALL ALSO HAVE A MINIMUM CLEARANCE HORIZONTALLY OF 2 FEET.

SIGNALS ERRECTED OVER THE ROADWAY SHALL HAVE A MINIMUM VERTICAL CLEARANCE OF 16 FT. ABOVE THE ROADWAY. POST MOUNTED SIGNALS SHALL BE A MINIMUM OF 8 FT. ABOVE THE SIDEWALK OR PAVEMENT.

ALL OVERHEAD SIGNALS MUST BE RIGIDLY MOUNTED, TOP AND BOTTOM, AND EQUIPPED WITH BACKPLATES.

THE MINIMUM HORIZONTAL DISTANCE BETWEEN SIGNALS MEASURED AT RIGHT ANGLES TO THE APPROACH SHALL BE 8 FEET.

EXACT LOCATION OF DETECTORS SHALL BE DETERMINED PRIOR TO INSTALLATION BY A REPRESENTATIVE OF PENNDOT.

PRIOR TO INSTALLATION THE CONTRACTOR SHALL CONSULT THE LOCAL OFFICIALS AND UTILITY COMPANIES TO RESOLVE ANY PROBLEMS WHICH MAY BE CREATED DUE TO THE LOCATION OF UTILITIES.

THIS DRAWING CANNOT BE USED AS A CONSTRUCTION DRAWING UNLESS THE PERMITTEE COMPLIES WITH THE PROVISIONS OF THE LATEST AMENDMENT TO ACT 287, PREVENTION OF DAMAGE TO UNDERGROUND UTILITIES, DATED DECEMBER 20, 1974.

WHEN LIQUID FUELS MONEY IS USED, SIGNAL INSTALLATION MUST CONFORM TO FORM 408 AND A COPY OF THE PROPOSED SPECIFICATIONS MUST BE SUBMITTED TO THE DISTRICT TRAFFIC UNIT, FOR REVIEW, PRIOR TO BIDDING.

CONDUIT INSTALLED IN BITUMINOUS ROADWAY LESS THAN 5 YEARS OLD, OR CONCRETE ROADWAY REGARDLESS OF AGE, MUST BE BORED OR JACKED UNDER THE ROADWAY. INSTALL IN ACCORDANCE WITH TRAFFIC SIGNAL STANDARDS TC-8800 SERIES.

SYSTEM PERMIT # I-0010

PENNSYLVANIA DEPARTMENT OF TRANSPORTATION
 ENGINEERING DISTRICT 6-0

COUNTY: DELAWARE
 MUNICIPALITY: RADNOR TOWNSHIP
 INTERSECTION: KING OF PRUSSIA ROAD
AND RAIDER ROAD

REVIEWED: _____ DATE _____

MUNICIPAL OFFICIAL _____ DATE _____

RECOMMENDED: _____ DATE _____

DISTRICT TRAFFIC ENGINEER _____ DATE _____

NO.	REVISION	DES./REVW.	DATE	REVW.	DATE	RECOM.	DATE
1							
2							
3							
4							
5							
6							
7							
8							